




浙江金鹰集团有限公司

ZHE JIANG GOLDEN EAGLE GROUP CO., LTD

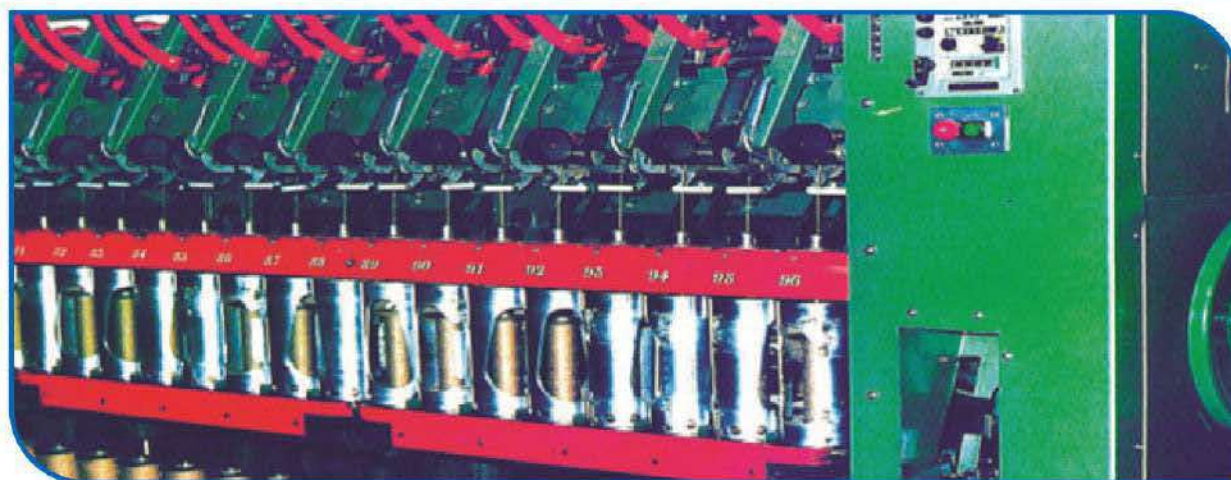

JUTE SPINNING FRAME Type : Apron Draft Spinning Frame

Technical Specification :

01	Hand of Drive	Both R.H & L.H
02	Type of Frame	Apron draft
03	Type of Flyer	Baxter
04	No. of Yarn	20 lbs/spy
05	No.of Spindles Per Frame	24/96
06	Traverse & Diameter of Bobbin	7 1/2" x 3 1/2"
07	Dead Spindle Diameter	3/4" (ball spring loaded)
08	Diameter of Bobbin Carrier Tube	7/8"
09	Diameter of Bottom Roller	2 1/4", journal dia. 1.771"
10	Diameter of Retaining Roller	2 1/4", journal dia. 1 3/8"
11	Flutes Per Inch on Retaining Roller	20
12	Diameter & Face of Pressing Roller	6 1/8" x 5/8"
13	Draft Range	10-20
14	Twist range	5-10
15	Diameter of Cylinder	5 7/8"
16	Diameter & Type of Wharve	2" special
17	Width of Tape	1"
18	Range of Flyer Speed	3400-4000 rpm
19	Description oi Drive to Cylinder	Lenix
20	Individual Motor Drive Tape and Revolution of the Same	15 hp, 1440 rpm & starter suitable for 400/440 volts. 3 phase, 50 hz.
21	Position of Motor	Inside frame work
22	Overall Length	43'-45' (approx)
23	Overall Breadth	6'-9" (approx)

Phone: 0580-8020089, Fax: 0580-8020228, E-mail: jjjt@cn-goldeneagle.com

Address: Dinghai, Zhoushan City, Zhejiang Province, China.

Website: <http://www.cn-goldeneagle.com>